


SWIVEL NUT BALL VALVE KIT

DN20 Press Fit X DN15 Reducer

Lead Free
SN30LF

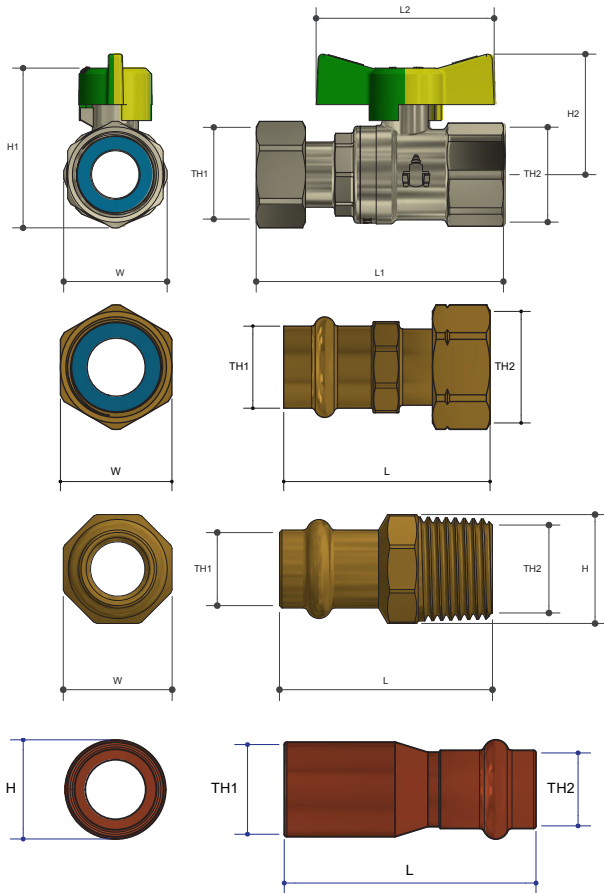

Specifications

Working Temperature

Water: 1°C to 95°C | Gas: -20°C to 120°C

Maximum Pressure Rating

Water: 2500kPa | Gas: 2100kPa

Sizing Chart (MM)

SN30LF	L1	L2	H1	H2	W	TH1	TH2
H20FG	78	56	50	38	33	G 3/4"	Rp 3/4"
H20FWLF	78	56	50	38	33	G 3/4"	Rp 3/4"
PFW155LF	52	-	-	-	28	DN15	G 1/2"
PFW141LF	49	-	29	-	27	DN20	R 3/4"
PFG141	49	-	29	-	27	DN20	R 3/4"
PFW041	55	-	19	-	-	DN20	DN15

For more information on Logi Valve, contact:

Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia


P. 1300 780 430

F. 1300 780 441

E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2025. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.2 | 11/07/2025

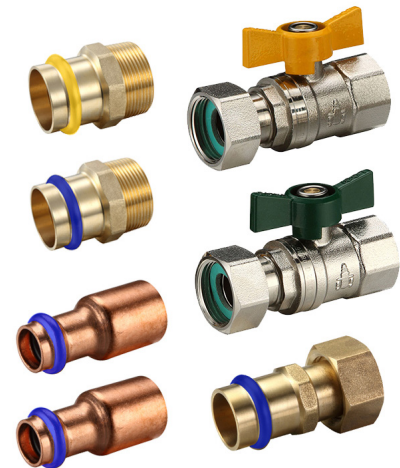

Lead Free
AS 4796
WMTS 012
Lic 649

AGA
AS 4617
Lic 6132

Features

Watermark and AGA approved

Swivel nut

Blow Proof Spindle

Tested and certified to:

WMTS-012 | AS3688 (for Water) | AS4617 (for Gas)

Material Chart

Part	SN20FWLF	H20FG	PFW155LF	PFW141LF	PFG141	PFWQ41
Body	DR LF Brass	Brass	DR LF Brass			
Cap	DR LF Brass	Brass	na			
Seal	PTFE	FKM	EPDM	FKM	EPDM	
Ball	Stainless Steel		na			
Spindle	Stainless Steel		na			
Handle	Aluminium		na			
O Ring	FKM	HNBR	FKM	HNBR	EPDM	
Washer	BA-U		Fibre	na		
Ret. Ring	Stainless Steel		na			

AW
AUSTWORLD