


GAS FITTINGS - BRASS

Elbow MI Lugged

Product Specifications

METPRESSTM
SUPERIOR PRESSFIT SYSTEM

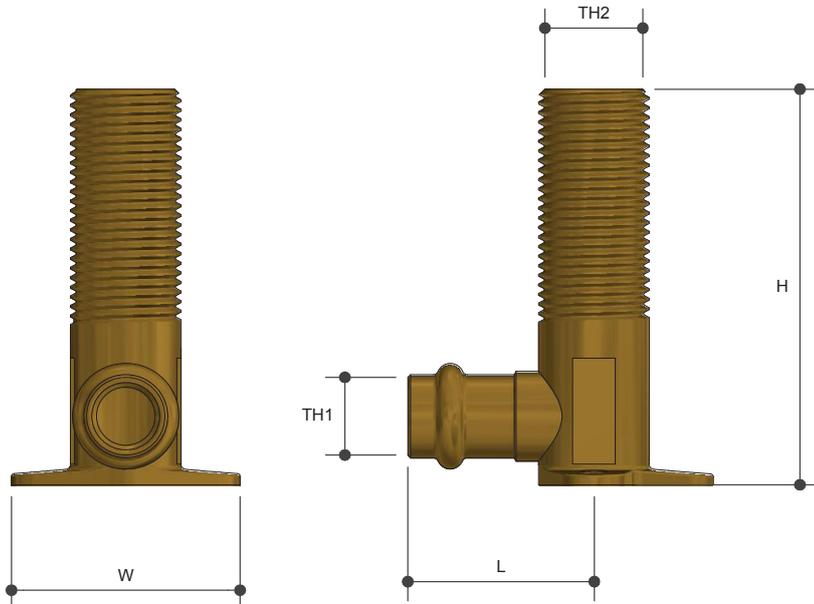

Specifications

Working temperature -40°C to 120°C

Max. pressure rating 1600kPa

Sizing Chart (MM)

| | L | H | W | TH1 | TH2 |
|--------|------|-----|----|------|--------|
| PFG185 | 35 | 75 | 43 | DN15 | G 1/2" |
| PFG186 | 35 | 90 | 43 | DN20 | G 1/2" |
| PFG188 | 45 | 75 | 43 | DN20 | G 1/2" |
| PFG189 | 57 | 89 | 47 | DN20 | G 3/4" |
| PFG194 | 79.5 | 250 | 63 | DN25 | G 1" |
| PFG195 | 82.5 | 250 | 63 | DN32 | G 1" |

Features



DR Brass

Tested and certified to AS3688

Tested and certified to AS/NZS5601.1

Material Chart

| Part | Material |
|--------|----------|
| Body | DR Brass |
| O Ring | HNBR |

For more information on Metpress fittings, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2025.
Austworld and Metpress are registered trade mark belonging to Austworld Pty Ltd.

AW
AUSTWORLD