


WATER SERVICE BALL VALVES

Right Angle DN X MI Lockable Lead Free

Product Specifications

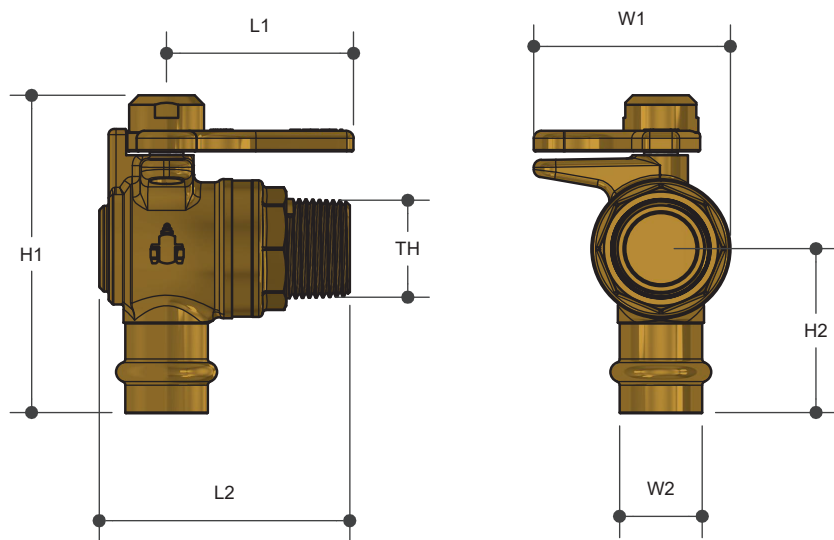

Specifications

Working temperature 1°C to 95°C

Max. pressure rating 2500kPa

Sizing Chart (MM)

	L1	L2	W1	W2	H1	H2	TH1
WRA20PMLF	50	67	53	20	85	44	R 3/4"

For more information on Logi Civil, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018.
Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.



Features

Watermark Lead Free Approved

DR Lead Free Brass

Full Bore

100% pressure tested

Lockable ON and OFF

WSAA Appraised

Tested and certified to AS4796

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Seal	PTFE
Ball	Stainless Steel
Handle	DR Brass
O Ring	FKM
Spindle	Stainless Steel
Nut	DR Brass

