


SCREWED BRASSWARE

Barrel Union MI X FI Lead Free

Product Specifications

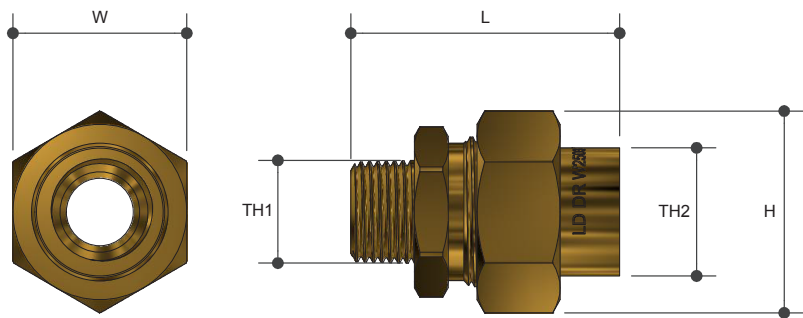

Specifications

Working Temperature 1°C - 95°C

Maximum Pressure Rating 1600kPa

Sizing Chart (MM)

	L	H	W	TH1	TH2
BUM06LF	44	25	23	R 1/4"	Rp 1/4"
BUM10LF	43	32	28	R 3/8"	Rp 3/8"
BUM15LF	54	37	35	R 1/2"	Rp 1/2"
BUM20LF	54	49	46	R 3/4"	Rp 3/4"
BUM25LF	65	53	50	R 1"	Rp 1"
BUM32LF	76	60	56	R 1 1/4"	Rp 1 1/4"
BUM32NBLF	76	60	56	R 1 1/4"	Rp 1 1/4"
BUM40LF	78	66	63	R 1 1/2"	Rp 1 1/2"
BUM50LF	88	79	74	R 2"	Rp 2"

Features

Watermark Lead Free Approved

Tested and Certified to AS 3688



Material Chart

Part	Material
Body	DR Lead Free Brass
Nut	Brass

For more information on Metforge, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Metforge are registered trade mark belonging to Austworld Pty Ltd.

