


FLARED COMPRESSION

Union C X C Reducing Lead Free

Product Specifications

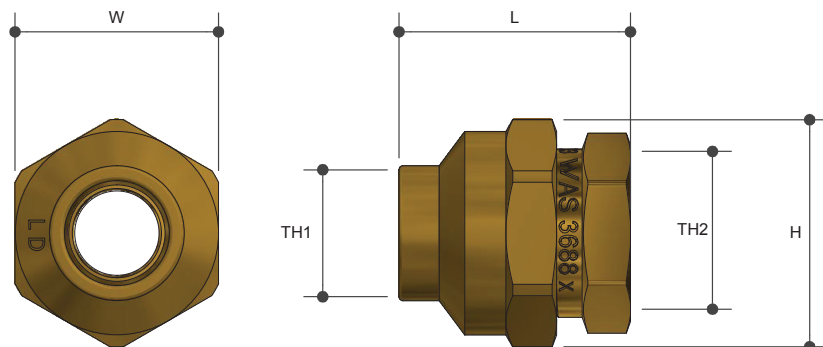

Specifications

Maximum Working Temperature 1°C to 95°C

Maximum Pressure Rating 1600kPa

Sizing Chart (MM)

| | L | H | W | TH1 | TH2 |
|---------|----|----|----|-----|-----|
| AW756LF | 36 | 35 | 32 | 20C | 15C |
| AW759LF | 30 | 28 | 35 | 25C | 20C |

Features

Watermark Lead Free Approved

Tested and Certified to AS 3688

Material Chart

| Part | Material |
|-----------------|--------------------|
| Union | DR Lead Free Brass |
| Compression Nut | Brass |
| Olive | DR Lead Free Brass |



For more information on Metforge, contact:

Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia

P. 1300 780 430

F. 1300 780 441

E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Metforge are registered trade mark belonging to Austworld Pty Ltd.

