
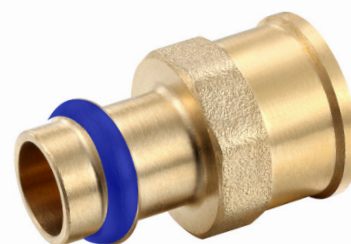


# WATER FITTINGS - BRASS

Female Coupling Lead Free

## Product Specifications

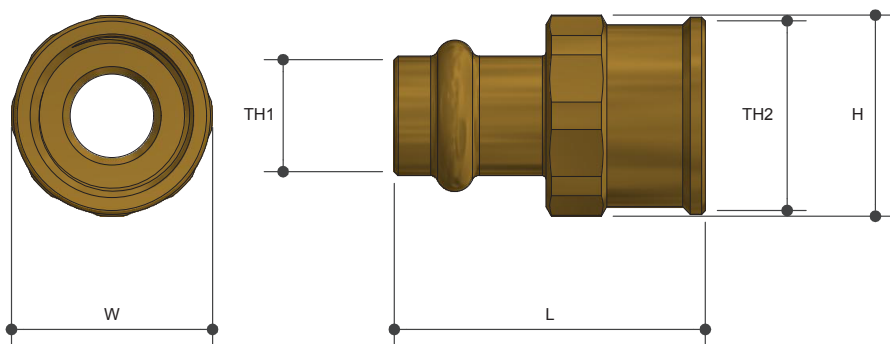

## Specifications

Working temperature -20°C to 120°C

Max. pressure rating 2000kPa

## Sizing Chart (MM)

|          | L    | H    | W    | TH1  | TH2       |
|----------|------|------|------|------|-----------|
| PFW149LF | 41   | 27   | 27   | DN15 | Rp 1/2"   |
| PFW150LF | 46   | 31   | 31   | DN20 | Rp 3/4"   |
| PFW308LF | 44.5 | 40.5 | 38.5 | DN20 | Rp 1"     |
| PFW151LF | 49   | 39   | 39   | DN25 | Rp 1"     |
| PFW152LF | 53   | 50   | 50   | DN32 | Rp 1 1/4" |
| PFW153LF | 59   | 57   | 57   | DN40 | Rp 1 1/2" |
| PFW154LF | 65   | 64   | 64   | DN50 | Rp 2"     |
| PFW222LF | 86   | 85   | 85   | DN65 | Rp 2 1/2" |
| PFW224LF | 92   | 91   | 91   | DN80 | Rp 3"     |

## Features

Watermark approved

DR Lead Free Brass

Tested and certified to AS3688



## Material Chart

| Part   | Material           |
|--------|--------------------|
| Body   | DR Lead Free Brass |
| O Ring | FKM                |

For more information on Metpress fittings, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430 F. 1300 780 441 E. [info@austworld.com.au](mailto:info@austworld.com.au)

Austworld Pty Ltd. All rights reserved 2020.  
Austworld and Metpress are registered trade mark belonging to Austworld Pty Ltd.

**METPRESS**<sup>TM</sup>  
SUPERIOR PRESSFIT SYSTEM

**AW**  
AUSTWORLD