


# WATER SERVICE BALL VALVES

Right Angle Meter Stop Swivel Nut Fl Lockable  
Lead Free

## Product Specifications

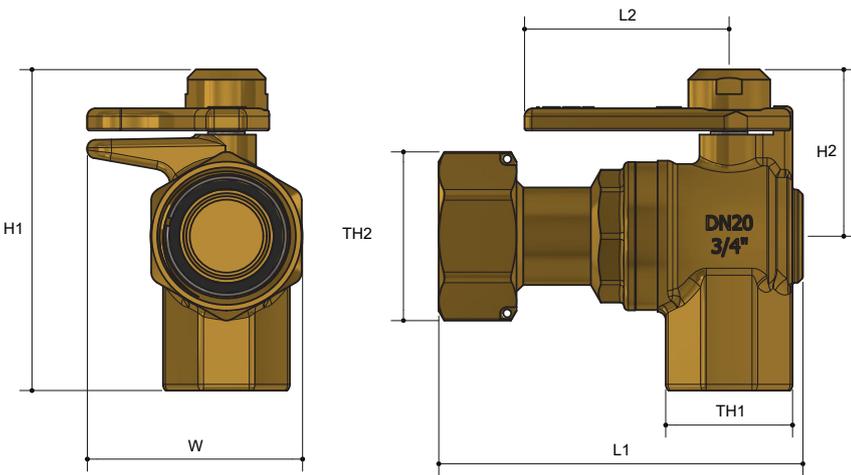

### Features

- Watermark Lead Free Approved
- DR Lead Free Brass
- Full Bore
- 100% pressure tested
- WSAA Appraised
- Lockable ON and OFF
- Tested and certified to AS 4796

### Specifications

Working temperature 1°C to 90°C

Max. pressure rating 2500kPa

### Sizing Chart (MM)

	L1	L2	H1	H2	W1	TH1	TH2
WRA20FSLF	89	50	79	41	53	Rp 3/4"	*DN20

\* Meter Thread WSA PS 300

### Material Chart

Part	Material
Body	DR Lead Free
Cap	DR Lead Free
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	DR Brass
Nut	DR Brass
Retaining Ring	Stainless Steel
Washer	EPDM

For more information on Logi Civil, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018.  
Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.

