


METER TAPPING KIT

Press Fit Lockable 20MM X 25MM Lead Free

Product Specifications

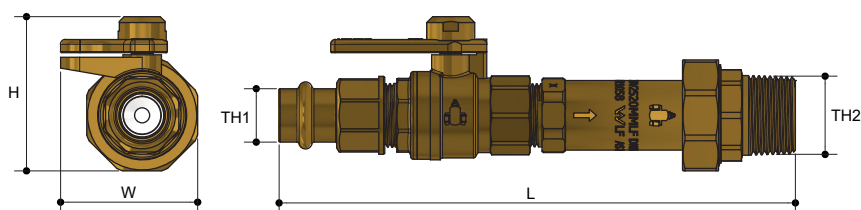

Specifications

Working temperature 1 °C to 60 °C

Max. pressure rating 1200kPa

Sizing Chart (MM)

	L	H	W	TH1	TH2
TK31LF	215	64	57	DN20	R 1"

Component Chart

Part Code	Material
DOV2520MMLF	Dual Check Valve MI 25 x MI 20 Lead Free
PFW150LF	Female Coupling DN20 X 3/4FI Lead Free
WB20MBLLF	Ball Valve BR Handle MI X FI 20MM Lockable Lead Free



Lead Free

AS 4796
WMTS 012
Lic 649

AS 3688
Lic 2503

AS 2845.1
Lic 21058

Features

Watermark Lead Free Approved

DR Lead Free Brass

Protects against backflow and siphonage

Suitable for Vertical and Horizontal Installation

100% factory tested

Integral filter

Easy installation using quality brass press fittings

For more information on Logi Civil, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018.
Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.

