

FERRULE COCK BONNET

TPFNR Forged MI x MI

Product Specifications




Features

Watermark Lead Free Approved

DR Lead Free Brass

100% pressure tested

Tested and certified to AS 3718

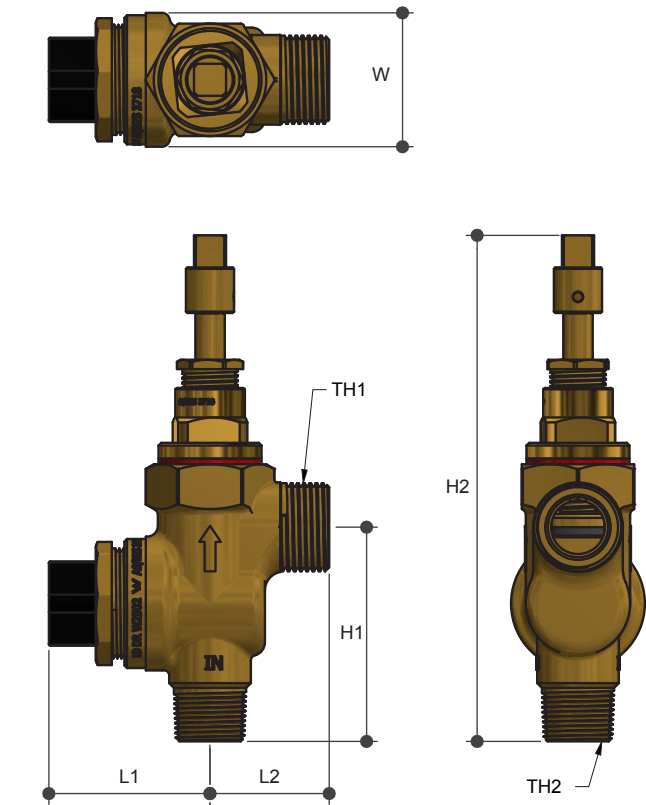

Specifications

Working temperature 1 °C to 95 °C

Max. pressure rating 2500kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
TP20FGLF	60	45	80	189	50	G 1"	R 3/4"
TP25FGLF	68	58	63	227	95	G 1 1/4"	R 1"

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Washer	Fibre
Gland	PE
Handle	Brass
O Ring	NBR
Spindle	DR Lead Free Brass
Jumper Valve	DR Lead Free Brass
Jumper Valve	DR Lead Free Brass
Gland Nut	Brass

For more information on Logi Civil, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018.
Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.

