


GAS APPROVED BALL VALVE

316 Stainless Steel 2 Piece Lever Handle FI X FI

Product Specifications

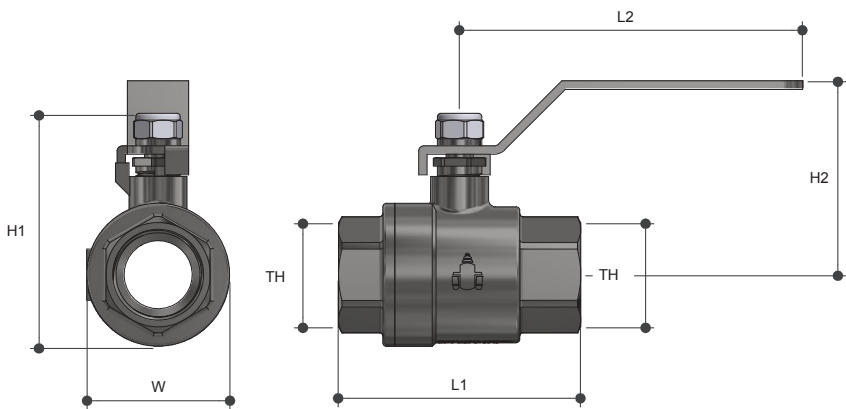

Features

- AGA approved
- Full bore
- 100% pressure tested
- Available in sizes 15mm (1/2") to 50mm (2")
- Blow proof spindle
- Stainless steel handle, balls, nut
- Tested and certified to AS 4617

Material Chart

Part	Material
Body	Stainless Steel (CF8M)
Cap	Stainless Steel
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
Handle	Stainless Steel

Specifications

- Working temperature -20°C to 120°C
- Maximum pressure rating 4000kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
SSGBV15	64	101	61	53	34	Rp 1/2"
SSGBV20	71	101	68	57	42	Rp 3/4"
SSGBV25	83	101	79	63	51	Rp 1"
SSGBV32	94	140	109	89	72	Rp 1 1/4"
SSGBV40	104	140	109	89	72	Rp 1 1/2"
SSGBV50	126	140	126	96	90	Rp 2"

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

