


# GAS APPROVED BALL VALVE

Butterfly Handle FI X FL

## Product Specifications

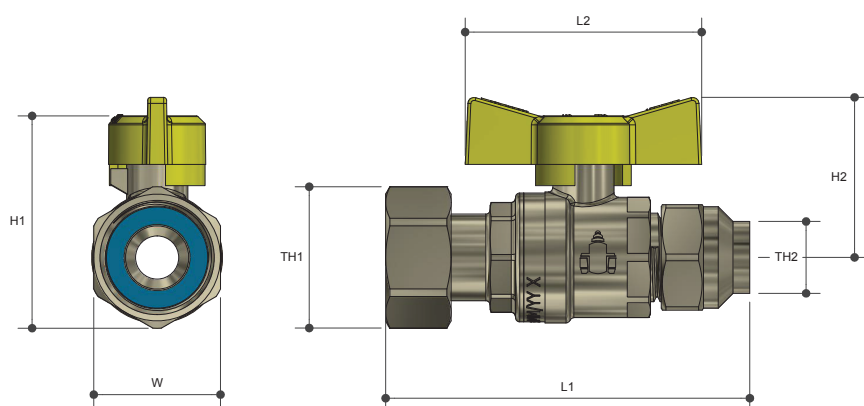

## Specifications

Working temperature -20°C to 120°C

Maximum pressure rating 2100kPa

## Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
H20G2015	86	56	49	38	30	G 3/4"	DN15

## Features

AGA approved

Full bore

100% pressure tested

Blow proof spindle

Aluminium handle

Swivel nut connection

Tested and certified to AS 4617

## Material Chart

Part	Material
Body	Brass
Cap	Brass
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	HNBR
Handle	Aluminium
Retaining Ring	Stainless Steel
Washer	BA-U

For more information on Logi Valve, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430 F. 1300 780 441 E. [info@austworld.com.au](mailto:info@austworld.com.au)

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

