


GAS APPROVED BALL VALVE

Butterfly Handle FL X FL

Product Specifications

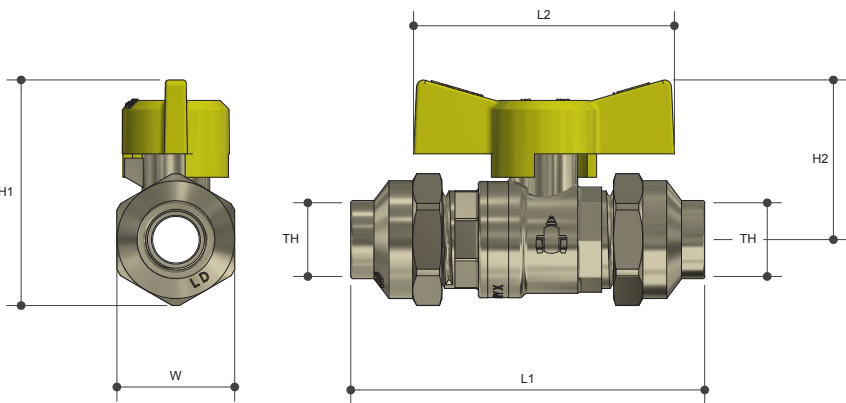

Features

- AGA approved
- 100% pressure tested
- Available in sizes 15mm (1/2") to 20mm (3/4")
- Blow proof spindle
- Aluminium handle
- Tested and certified to AS 4617

Specifications

- Working temperature -20°C to 120°C
- Maximum pressure rating 2100kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
G15	56	34	34	34	79	DN15
G20	56	38	38	38	91	DN20

Material Chart

Part	Material
Body	Brass
Seal	PTFE
Ball	Stainless Steel
Bonnet	Brass
Spindle	Stainless Steel
O Ring	HNBR
Handle	Aluminium
Nut	Brass
Lock Nut	Stainless Steel

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

