


# FERRULE

Standard Lead Free

## Product Specifications

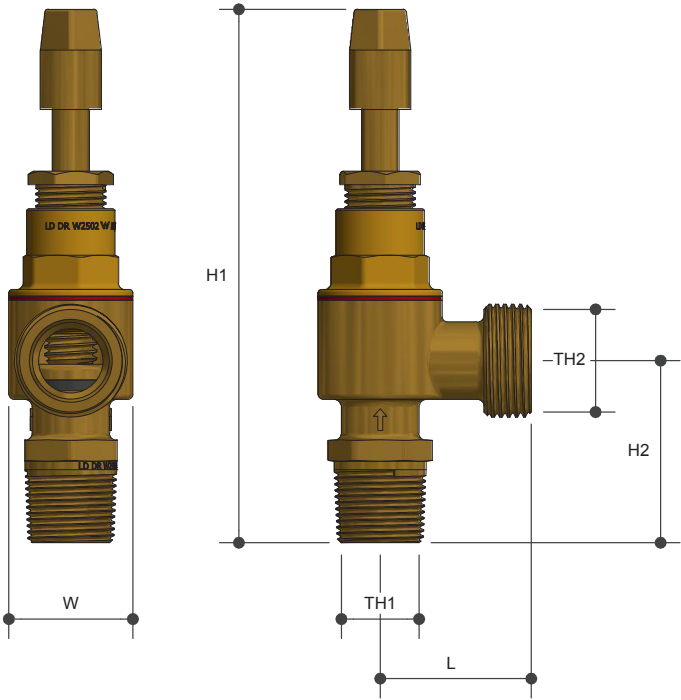

### Specifications

Working Temperature 1°C to 95°C

Maximum Pressure Rating 2500 kPa

### Sizing Chart (MM)

	L	H1	H2	W	TH1	TH2
FE20MLF	45	157	54	37	R 3/4"	G 1"



### Features

- Watermark Lead Free Approved
- DR Lead Free Brass
- 100% pressure tested
- WSAA Appraised
- Tested and certified to AS 3718

### Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Spindle	DR Lead Free Brass
Washer	Fibre
Seal	NBR
Gland	PE
Nut	Brass
Handle	Brass

For more information on Logi Civil, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430 F. 1300 780 441 E. [info@austworld.com.au](mailto:info@austworld.com.au)

Austworld Pty Ltd. All rights reserved 2018.  
Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.

