


# FERRULE BENDS

Flared Lead Free

## Product Specifications

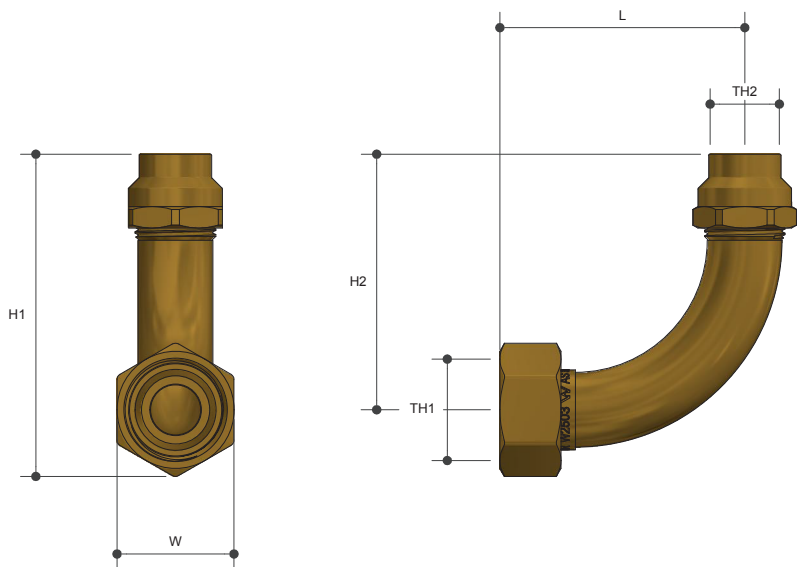

### Specifications

Working Temperature 1 °C to 95 °C

Maximum Pressure Rating 1600 kPa

### Features

Watermark Lead Free Approved

DR Lead Free Brass

100% pressure tested

Tested and certified to AS 3688

### Sizing Chart (MM)

	L	H1	H2	W	TH1	TH2
FB20CLF	80	105	83	38	G 1"	DN20

### Material Chart

Part	Material
Bend	DR Lead Free Brass
Nut	DR Brass
Compression Nut	DR Brass

For more information on Logi Civil, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430 F. 1300 780 441 E. [info@austworld.com.au](mailto:info@austworld.com.au)

Austworld Pty Ltd. All rights reserved 2018.  
Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.

