


DUAL CHECK VALVE

MI X FI with Strainer Lead Free

Product Specifications

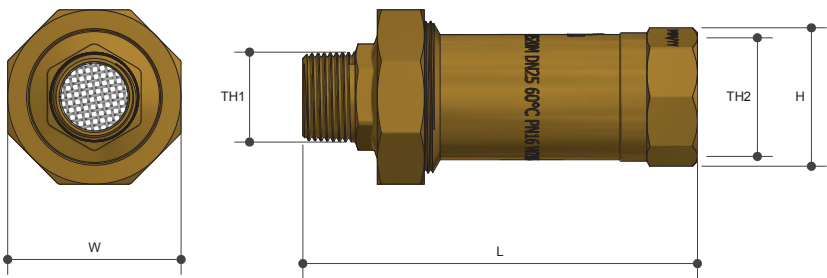

Dual Check Valves are utilised for protection from cross contamination of non potable water with potable water. They are used in low hazard conditions such as rain water tank systems and domestic meter connections.

Specifications

- Working temperature 1 °C to 60 °C
- Maximum working pressure 1200kPa
- Min. working pressure 60kPa
- Not to be used on hot water installations

Sizing Chart (MM)

	L	H	W	TH1	TH2
DOV2520MLF	117	41	51	R 3/4"	Rp 1"

Features

- Watermark approved
- Double check valve assembly for improved flow
- Compact design
- Protects against back flow and back siphonage
- Suitable for vertical or horizontal installations
- 100% factory tested for sealing operation
- Tested and certified to AS/NZS 2845.1
- Integral filter

Material Chart

Part	Material
Body	DR Lead Free Brass
Washer	Fibre
Nut	Brass
Nipple	DR Lead Free Brass
Check Valve	POM
Filter	Stainless Steel

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

