


# DUAL CHECK VALVE

Hand Shower Type Lead Free

## Product Specifications

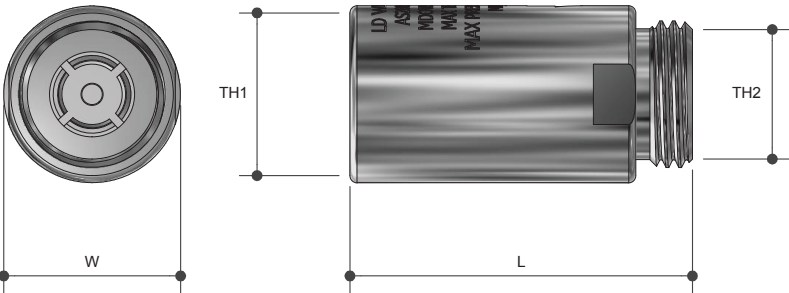

### Specifications

Maximum working temperature 60°C

Maximum working pressure 1200KPa

### Sizing Chart (MM)

	L	W	TH1	TH2
MDOV15CHLF	48	24	G 1/2"	G 1/2"

### Features

- Watermark approved
- Suitable for vertical and horizontal installations
- Seamless design for easy integration
- Protects against back flow and back siphonage
- Suitable for shower hoses
- Tested and certified to AS/NZS 2845.1

### Material Chart

Part	Material
Check Valve	ABS
Washer	EPDM
Body	DR Lead Free Brass

For more information on Logi Valve, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

