
## **FERRULE BENDS**

MI Lead Free

**Product Specifications** 





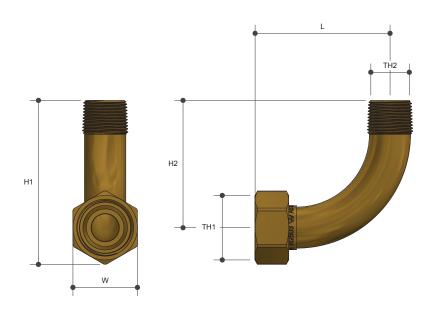

Features

ead Free

## **Specifications**

Working Temperature  $1\,^{\circ}\text{C}$  to  $95\,^{\circ}\text{C}$ 

Maximum Pressure Rating 1600 kPa

Watermark Lead Free Approved

DR Lead Free Brass

100% pressure tested

Tested and certified to AS 3688

## Sizing Chart (MM)

	L	H1	H2	W	TH1	TH2
FB20MLF	80	96	75	38	G 1"	R 3/4"

## Material Chart

Part	Material		
Bend	DR Lead Free Brass		
Nut	DR Brass		

For more information on Logi Civil, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430
F. 1300 780 441
E. info@austworld.com.au

