



DUAL APPROVED BALL VALVE

316 Stainless Steel 2 Piece Lever Handle FI X FI

Product Specifications

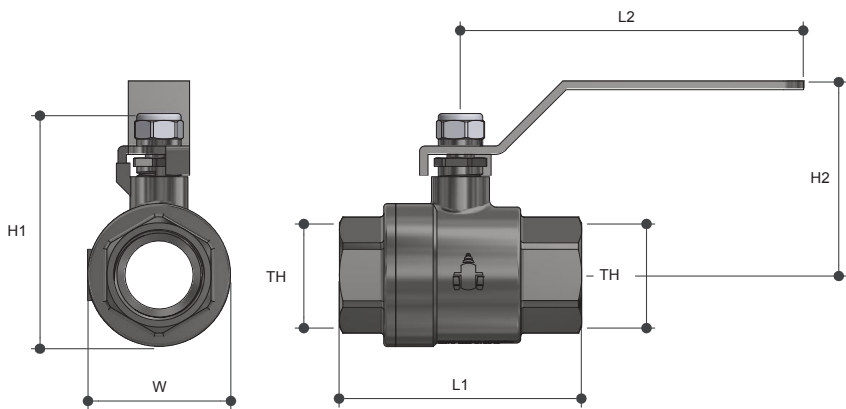

Specifications

Working Temperature
Water: 1 °C to 95 °C | Gas: -20 °C to 120 °C

Maximum Pressure Rating
Water: 4000kPa | Gas: 4000kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
SSW15F	64	101	61	53	34	Rp 1/2"
SSW20F	71	101	68	57	42	Rp 3/4"
SSW25F	83	101	79	63	51	Rp 1"
SSW32F	94	140	109	89	72	Rp 1 1/4"
SSW40F	104	140	109	89	72	Rp 1 1/2"
SSW50F	126	140	126	96	90	Rp 2"

Features

- Watermark and AGA approved
- Full bore
- 100% pressure tested
- Available in sizes 15mm (1/2") to 50mm (2")
- Blow proof spindle
- Stainless steel handle, balls, nut
- Tested and certified to WMTS-012 and AS4617

Material Chart

Part	Material
Body	Stainless Steel (CF8M)
Cap	Stainless Steel
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
Handle	Stainless Steel

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

