


DUAL CHECK VALVE

FI Lead Free

Product Specifications

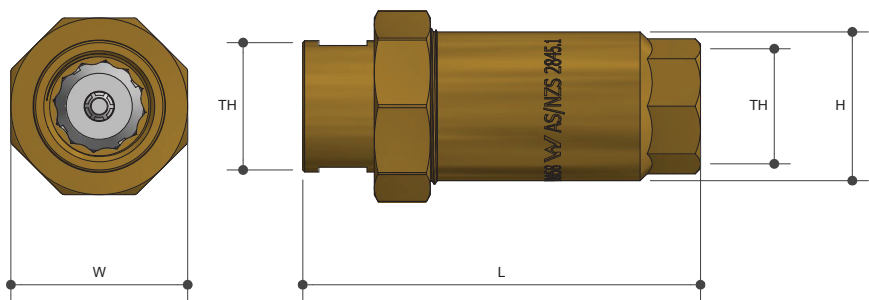

General

Dual Check Valves are utilised for protection from cross contamination of non potable water with potable water. They are used in low hazard conditions such as rain water tank systems and domestic meter connections.

Specifications

- Working temperature 1°C to 60°C
- Maximum working pressure 1600kPa
- Min. working pressure 60kPa
- Not to be used on hot water installations

Sizing Chart (MM)

	L	H	W	TH
DOV15LF	99	30	38	Rp 1/2"
DOV15CLF*	99	30	38	Rp 1/2"
DOV20LF	99	44	44	Rp 3/4"
DOV25LF	99	44	44	Rp 1"

* Chrome Plated

Features

- Watermark approved
- Double check valve assembly for improved flow
- Compact design
- Protects against back flow and back siphonage
- Suitable for vertical or horizontal installations
- 100% factory tested for sealing operation
- Tested and certified to AS/NZS 2845.1



Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Nut	DR Lead Free Brass
Seal	Fibre
Check Valve	ABS

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

