


DUAL CHECK VALVE

FI X FI with Atmospheric Port
Lead Free

Product Specifications

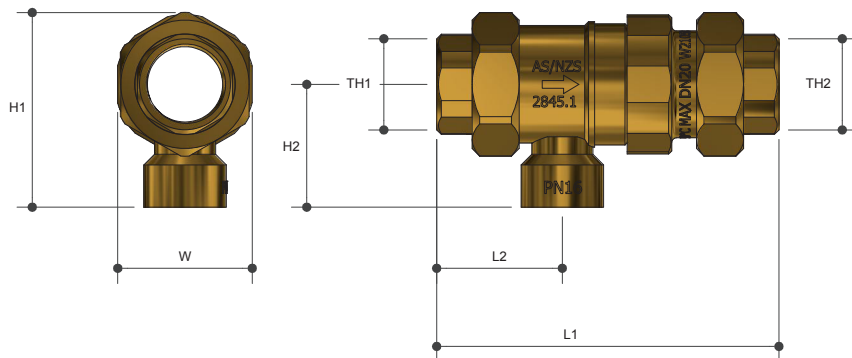

General

Dual Check Valves are utilised for protection from cross contamination of non potable water with potable water. They are used in low hazard conditions such as rain water tank systems and domestic meter connections.

Specifications

Working temperature 90°C

Maximum pressure rating 1600kPa

Flow rate 28L/min@70kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
DOVA20LF	105	43	64	40	44	Rp 3/4"	Rp 3/4"

Installation

The Dual Check valve with atmospheric port should be installed to AS3500-1 and by a licenced plumber.

*Please flush lines to prevent any debris from entering check valves.



Features

Watermark approved

DR Brass

Integrated strainer

Compact design

Protect against back flow and back siphonage

Suitable for horizontal installations

Low head loss

Tested and certified to AS/NZS 2845.1

Material Chart

Part	Material
Body	DR Lead Free Brass
Springs	Stainless Steel
Check Valve Stem	DR Lead Free Brass
Diaphragm	EPDM
Seals	EPDM
Water Separator	PPA
Strainer	Stainless Steel
Body	DR Lead Free Brass

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

