


DUAL APPROVED BALL VALVE

Lever Handle FI X FI Lead Free

Product Specifications

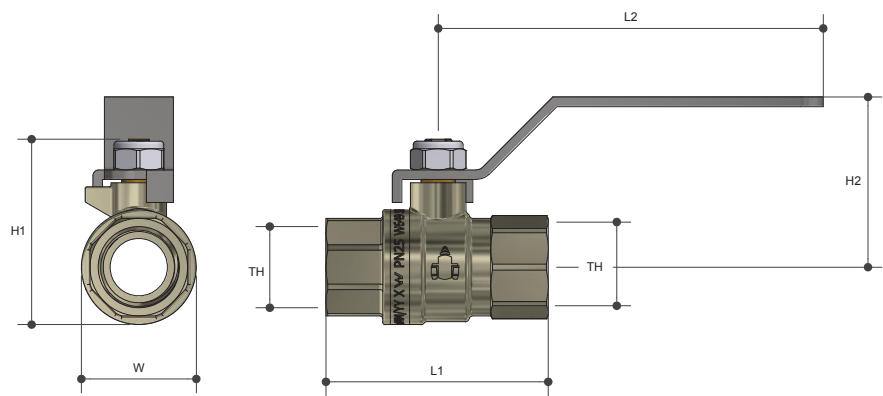

Specifications

Working Temperature
Water: 1 °C to 95 °C | Gas: -20 °C to 120 °C

Maximum Pressure Rating
Water: 2500kPa | Gas: 2100kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
W06FLF	48	87	47	44	25	Rp 1/4"
W15FLF	58	101	48	44	30	Rp 1/2"
W20FLF	66	101	48	48	37	Rp 3/4"
W25FLF	81	101	55	52	46	Rp 1"
W32FLF	91	140	80	71	58	Rp 1 1/4"
W40FLF	102	140	92	77	69	Rp 1 1/2"
W50FLF	121	140	108	85	84	Rp 2"
W65FLF	150	232	143	110	108	Rp 2 1/2"
W80FLF	177	232	166	122	130	Rp 3"
W100FLF	212	232	195	136	160	Rp 4"

Features

- Watermark Lead Free and AGA approved
- Full bore
- 100% pressure tested
- Available in sizes 6mm (1/4") to 100mm (4")
- Blow proof spindle
- Tested and certified to:
WMTS-012 (for Water) | AS4617 (for Gas)

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Stainless Steel

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

