


# DUAL APPROVED BALL VALVE

Butterfly Handle FI X FI Lead Free

## Product Specifications

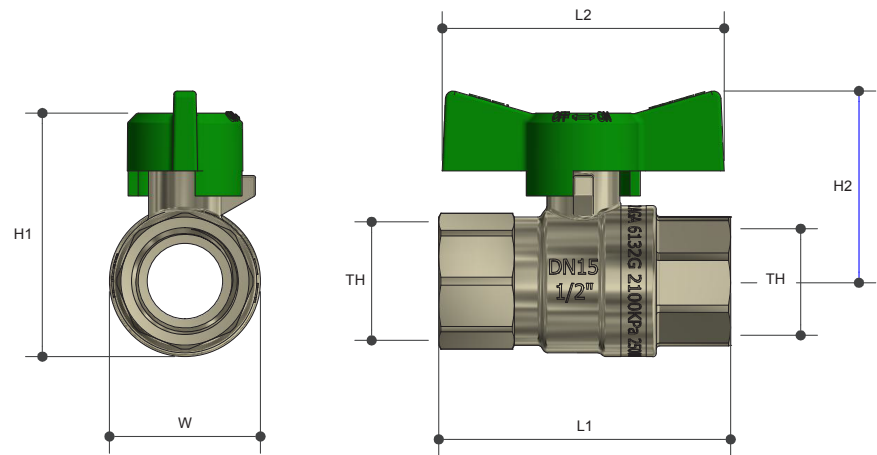

## Features

Watermark and AGA approved

Full bore

100% pressure tested

Available in sizes 15mm (1/2") to 25mm (1")

Blow proof spindle

Tested and certified to:  
WMTS-012 (for Water) | AS4617 (for Gas)

## Specifications

Working Temperature  
Water: 1 °C to 95 °C | Gas: -20 °C to 120 °C

Maximum Pressure Rating  
Water: 2500kPa | Gas: 2100kPa

## Sizing Chart (MM)

	L1	L2	H1	H1	W	TH
WB15FGLF	58	56	48	38	30	Rp 1/2"
WB20FGLF	66	56	55	41	37	Rp 3/4"
WB25FGLF	81	56	64	45	46	Rp 1"

## Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Aluminium

For more information on Logi Valve, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430    F. 1300 780 441    E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

