


DUAL APPROVED BALL VALVE

Lever Handle FI X FI Lilac Lockable
Lead Free

Product Specifications

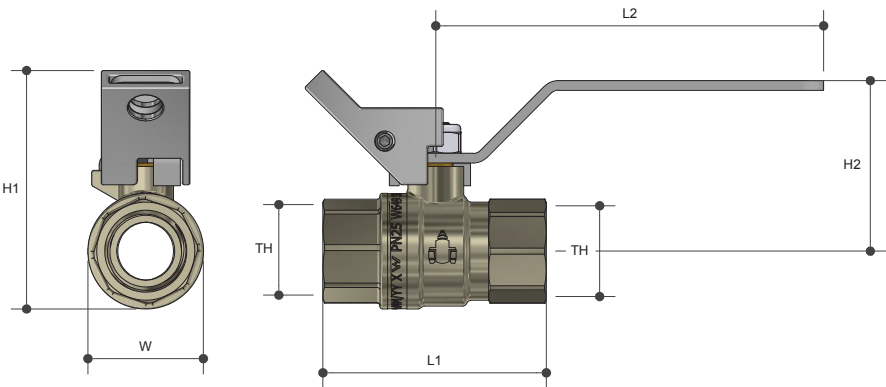

Features

Watermark and AGA approved

Full bore

100% pressure tested

Lockable on and off

Available in sizes 15mm (1/2") to 50mm (2")

Blow proof spindle

Tested and certified to:
WMTS-012 (for Water) | AS4617 (for Gas)

Specifications

Working Temperature
Water: 1°C to 95°C | Gas: -20°C to 120°C

Maximum Pressure Rating
Water: 2500kPa | Gas: 2100kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
RWLW15FLF	58	101	62	44	30	Rp 1/2"
RWLW20FLF	66	101	69	48	37	Rp 3/4"
RWLW25FLF	81	101	77	51	46	Rp 1"
RWLW32FLF	91	140	96	71	58	Rp 1 1/4"
RWLW40FLF	102	140	108	77	69	Rp 1 1/2"
RWLW50FLF	121	140	124	85	84	Rp 2"

Material Chart

Part	Material
Body	DR Brass Lead Free
Cap	DR Brass Lead Free
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Stainless Steel
Clip	Zinc

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

