


WATERMARKED BALL VALVE

Pressfit CU X FI Lever Handle
Lead Free

Product Specifications

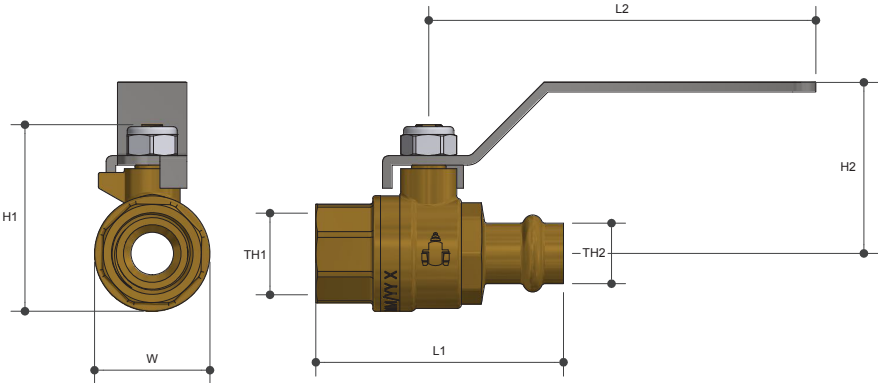

Features

- Watermark approved
- Full bore
- Available in sizes 15mm (1/2") to 50mm (2")
- 100% pressure tested
- Blow proof spindle
- For use with Viega, Rothenberger, Novopress, Kempress, Rems & V-Profile Tools only
- Tested and certified to WMTS-012

Specifications

- Working temperature 1°C to 95°C
- Maximum pressure rating 2500kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
WP15FLF	64	101	48	44	30	Rp 1/2"	DN15
WP20FLF	73	101	55	48	37	Rp 3/4"	DN20
WP25FLF	89	101	64	52	46	Rp 1"	DN25
WP32FLF	98	140	80	71	58	Rp 1 1/4"	DN32
WP40FLF	115	140	92	77	69	Rp 1 1/2"	DN40
WP50FLF	138	140	108	85	84	Rp 2"	DN50

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Stainless Steel

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

