


WATERMARKED BALL VALVE

Pressfit CU X CU Lever Handle
with Union Connector Lead Free

Product Specifications

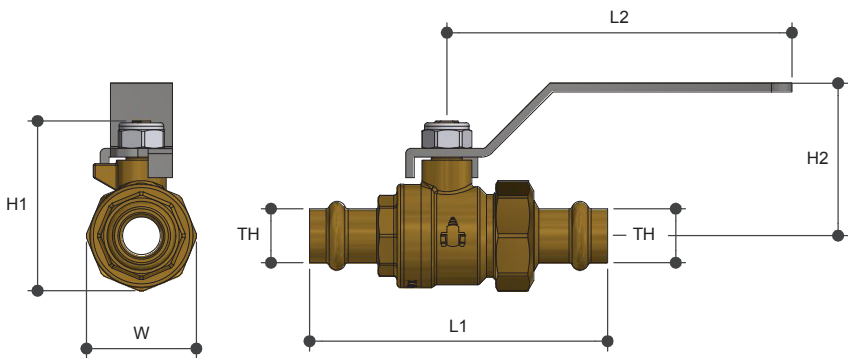

Specifications

Working temperature 1 °C to 95 °C

Maximum pressure rating 2500kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
WDU15LF	87	101	50	44	32	DN15
WDU20LF	101	101	57	48	40	DN20
WDU25LF	115	100	64	52	46	DN25
WDU32LF	133	140	100	71	58	DN32
WDU40LF	156	140	111	77	69	DN40
WDU50LF	188	140	127	85	84	DN50

Features

Watermark approved

Full bore

Available in sizes 15mm (1/2") to 50mm (2")

100% pressure tested

Blow proof spindle

Removable union for easy connection

For use with Viega, Rothenberger, Novopress, Kempress, Rems & V-Profile Tools only

Lead Free Compliant

Tested and certified to WMTS-012

Material Chart

Part	Material
Body	Lead Free DR Brass
Ball	Stainless Steel
Spindle	Stainless Steel
O Ring	FKM
Press Fit O Ring	FKM
Handle	Stainless Steel
Lock Nut	Stainless Steel

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

