


# GAS APPROVED BALL VALVE

Butterfly Handle FI X FI

## Product Specifications

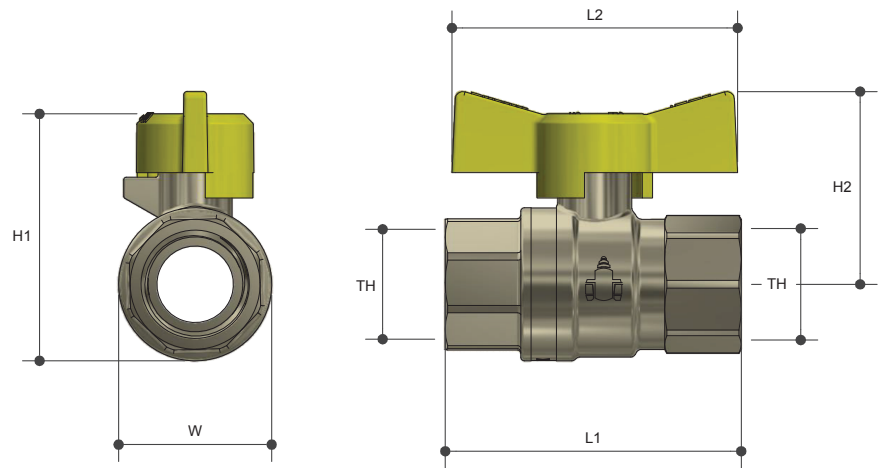

### Features

- AGA approved
- Full bore
- 100% pressure tested
- Available in sizes 15mm (1/2") to 25mm (1")
- Blow proof spindle
- Aluminium handle
- Tested and certified to AS 4617

### Specifications

- Working temperature -20°C to 120°C
- Maximum pressure rating 2100 kPa

### Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
WB15F	58	56	48	38	30	Rp 1/2"
WB20F	66	56	55	41	37	Rp 3/4"
WB25F	81	56	64	45	46	Rp 1"

### Material Chart

Part	Material
Body	Brass
Seal	PTFE
Ball	Brass
Bonnet	Brass
Spindle	Brass
O Ring	HNBR
Handle	Aluminium
Lock Nut	Stainless Steel

For more information on Logi Valve, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430    F. 1300 780 441    E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

