


GAS APPROVED BALL VALVE

Butterfly Handle MI X FI

Product Specifications

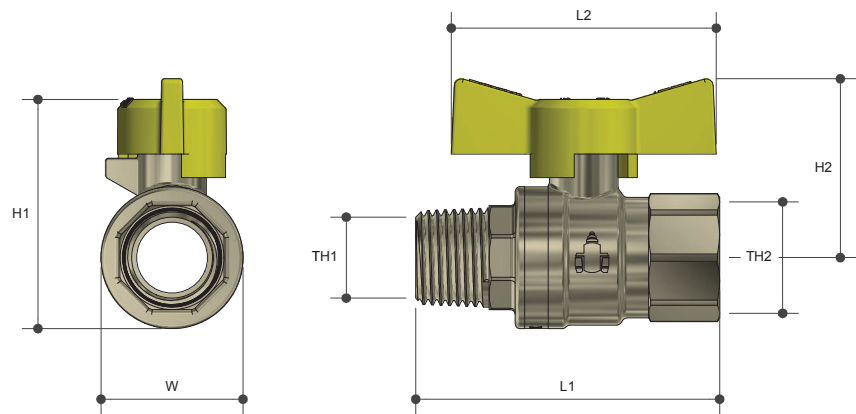

Features

- AGA approved
- Full bore
- 100% pressure tested
- Available in sizes 15mm (1/2") to 25mm (1")
- Blow proof spindle
- Aluminium handle
- Tested and certified to AS 4617

Specifications

- Working temperature -20°C to 120°C
- Maximum pressure rating 2100 kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
WB15M	64	56	48	38	30	R 1/2"	Rp 1/2"
WB20M	73	56	55	41	37	R 3/4"	Rp 3/4"
WB25M	87	56	64	45	46	R 1"	Rp 1"

Material Chart

Part	Material
Body	Brass
Cap	Brass
Ball	Stainless Steel
Spindle	Stainless Steel
O Ring	HNBR
Handle	Aluminium

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

