


GAS APPROVED BALL VALVE

Butterfly Handle FL X FL

Product Specifications

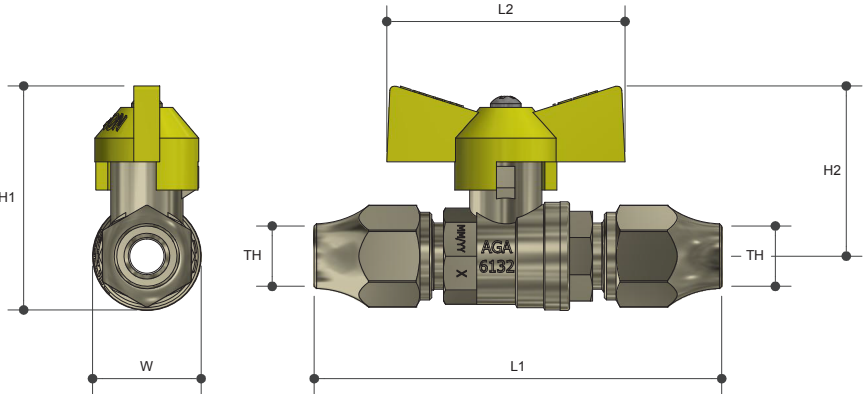

Features

- AGA approved
- 100% pressure tested
- Aluminium handle
- Tested and certified to AS 4617

Specifications

- Working temperature -20°C to 120°C
- Maximum pressure rating 2100kPa

Sizing Chart (MM)

| | L1 | L2 | H1 | H2 | W | TH |
|-----------|----|----|----|----|----|-----|
| G10 [SAE] | 86 | 51 | 47 | 36 | 23 | 10C |

Material Chart

| Part | Material |
|----------|-----------------|
| Body | Brass |
| Seal | PTFE |
| Ball | Brass |
| Bonnet | Brass |
| Spindle | DR Brass |
| Gland | PTFE |
| Handle | Aluminium |
| Nut | Brass |
| Lock Nut | Stainless Steel |
| O-Ring | HNBR |

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

