
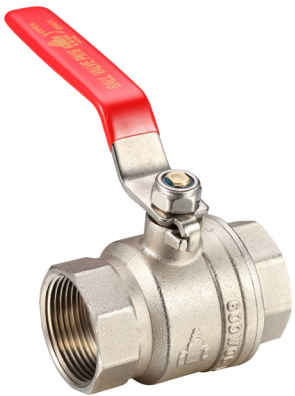


GENERAL PURPOSE BALL VALVE

Lever Handle FI X FI

Product Specifications

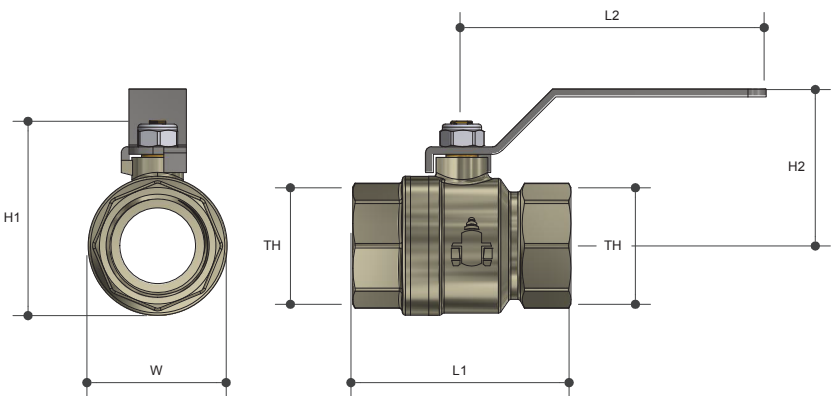

Specifications

Working temperature 1 °C to 95 °C

Maximum pressure rating 1600kPa

Sizing Chart (MM)

	SIZE	H1	H2	L1	L2	W	TH
BV11	6MM	47	44	46	88	20	Rp 1/4"
BV12	10MM	47	44	50	88	20	Rp 3/8"
BV01	15MM	51	45	51	90	25	Rp 1/2"
BV02	20MM	55	48	58	101	30	Rp 3/4"
BV03	25MM	64	62	72	122	38	Rp 1"
BV04	32MM	80	70	81	122	45	Rp 1 1/4"
BV05	40MM	92	77	90	140	53	Rp 1 1/2"
BV06	50MM	108	85	110	140	67	Rp 2"
BV07	65MM	143	110	137	232	82	Rp 2 1/2"
BV08	80MM	187	122	163	232	95	Rp 3"
BV09	100MM	193	150	187	226	160	Rp 4"

Features

Available in sizes 6mm (1/4") to 100mm (4")

Full Bore

100% pressure tested

Blow proof spindle

Stainless steel handle

Material Chart

Part	Material
Body	Brass
Seal	PTFE
Ball (15-40MM)	Brass
Ball (50MM)	Stainless Steel
Spindle (15-40MM)	Brass
Spindle (50MM)	Stainless Steel
Bonnet	Brass
O Ring	FKM
Handle	Stainless Steel
Lock Nut	Stainless Steel

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

