


GATE VALVE

General Purpose

Product Specifications

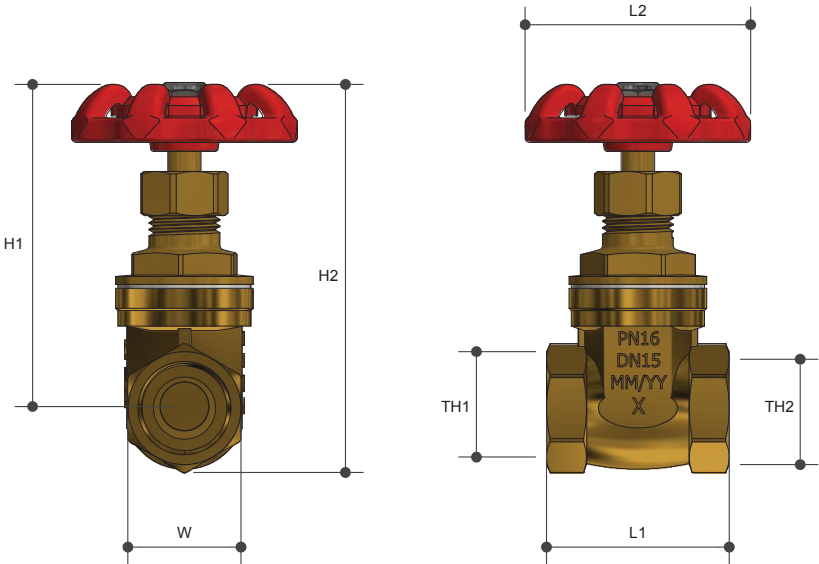

Specifications

Working temperature 1 °C to 95 °C

Maximum pressure rating 1600 KPa

Features

Full Bore

100% pressure tested

Available in sizes 15mm (1/2") to 100mm (4")

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
GV01	41	51	73	88	26	G 1/2"	G 1/2"
GV02	51	51	78	96	31	G 3/4"	G 3/4"
GV03	55	60	93	112	38	G 1"	G 1"
GV04	55	72	110	139	48	G 1 1/4"	G 1 1/4"
GV05	60	77	119	151	54	G 1 1/2"	G 1 1/2"
GV06	65	95	144	182	66	G 2"	G 2"
GV07	92	110	175	223	84	G 2 1/2"	G 2 1/2"
GV08	94	110	192	249	98	G 3"	G 3"
GV09	104	124	243	313	123	G 4"	G 4"

Material Chart

Part	Material
Body	Brass
Cover	Brass
Gate	Brass
Stem	Brass
Lock Nut	Brass
Packing Gland	PTFE
Gasket	PTFE
Hex Cap	Stainless Steel
Indication Cap	Stainless Steel
Nut	Brass
Handle	Cast Iron

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

