


HVAC WATERMARKED BALL VALVES

Extended Lever Handle FI X FI with Test Point
and Extensions Lead Free

Product Specifications

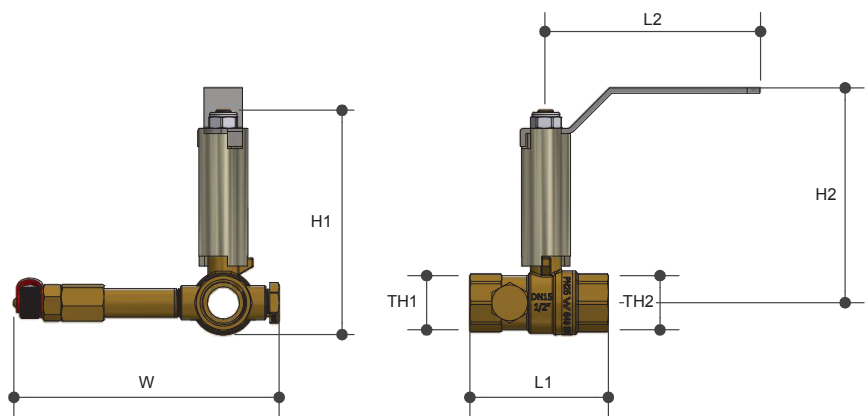

Lead Free
AS 4796
WMTS-012
Lic 649

Specifications

Working temperature 1 °C to 95 °C
Maximum pressure rating 2500kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
HE15FEXPLF	65	100	105	100	125	Rp 1/2"	Rp 1/2"
HE20FEXPLF	72	100	112	104	130	Rp 3/4"	Rp 3/4"
HE25FEXPLF	87	100	121	108	138	Rp 1"	Rp 1"
HE32FEXPLF	97	140	136	129	147	Rp 1 1/4"	Rp 1 1/4"
HE40FEXPLF	108	140	147	132	155	Rp 1 1/2"	Rp 1 1/2"
HE50FEXPLF	127	140	162	139	168	Rp 2"	Rp 2"

Features

- Watermark approved
- Full bore
- 100% pressure tested
- Available in sizes 15mm (1/2") to 50mm (2")
- Blow proof spindle
- Tested and certified to WMTS012

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Extension	DR Lead Free Brass
Test Plug	DR Lead Free Brass

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

