


HVAC WATERMARKED BALL VALVES

Extended Lever Handle FI X FI with Test Point,
Mini Ball Valve and Extensions Lead Free

Product Specifications

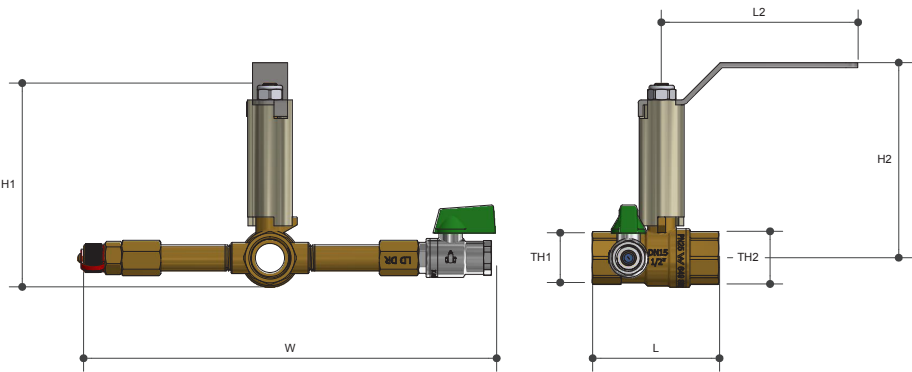

Specifications

Working temperature 1 °C to 95 °C
Maximum pressure rating 2500kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
HE15FEXDPLF	65	100	105	100	212	Rp 1/2"	Rp 1/2"
HE20FEXDPLF	72	100	111	103	219	Rp 3/4"	Rp 3/4"
HE25FEXDPLF	87	100	121	108	225	Rp 1"	Rp 1"
HE32FEXDPLF	98	140	135	126	234	Rp 1 1/4"	Rp 1 1/4"
HE40FEXDPLF	108	140	146	131	242	Rp 1 1/2"	Rp 1 1/2"
HE50FEXDPLF	127	140	163	141	255	Rp 2"	Rp 2"

Features

- Watermark approved
- Full bore
- 100% pressure tested
- Available in sizes 15mm (1/2") to 50mm (2")
- Blow proof spindle
- Tested and certified to WMTS-012

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Stainless Steel
Test Point	DR Lead Free Brass
Mini Ball Valve	DR Lead Free Brass
Extension	DR Brass

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

