


HVAC WATERMARKED BALL VALVES

Lever Handle FI X FI with Test Point Lockable
Lead Free

Product Specifications

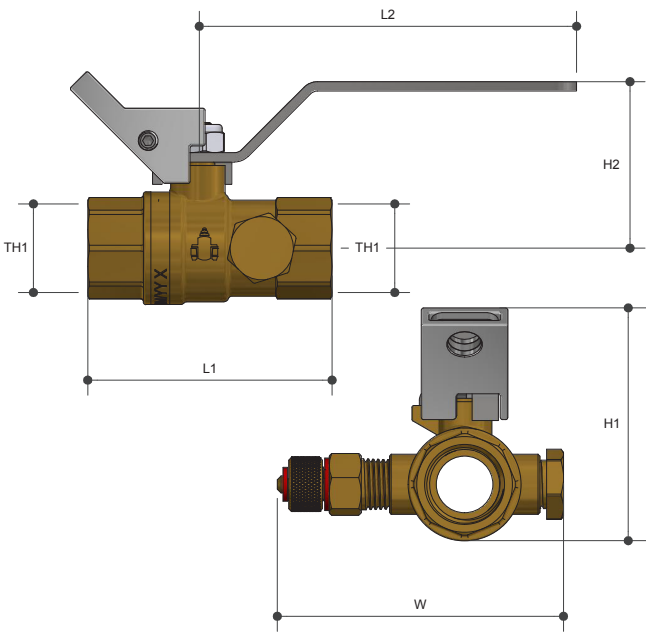

Specifications

Working temperature 1°C to 95°C

Maximum pressure rating 2500kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
HVW15FLF	65	100	62	44	76	Rp 1/2"	Rp 1/2"
HVW20FLF	87	100	77	51	90	Rp 3/4"	Rp 3/4"
HVW25FLF	72	100	69	48	86	Rp 1"	Rp 1"
HVW32FLF	98	140	100	71	99	Rp1 1/4"	Rp1 1/4"
HVW40FLF	108	140	111	77	107	Rp1 1/2"	Rp1 1/2"
HVW50FLF	127	140	127	85	120	Rp 2"	Rp 2"

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024



Features

Watermark approved

Full bore

100% pressure tested

Lockable ON and OFF

Available in sizes 15mm (1/2") to 50mm (2")

Blow proof spindle

Tested and certified to WMTS-012

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Stainless Steel
Test Plug	DR Lead Free Brass
Clip	Zinc

