


HVAC WATERMARKED BALL VALVES

Lever Handle FI X FI with Test Point
and Mini Ball Valve Lockable Lead Free

Product Specifications

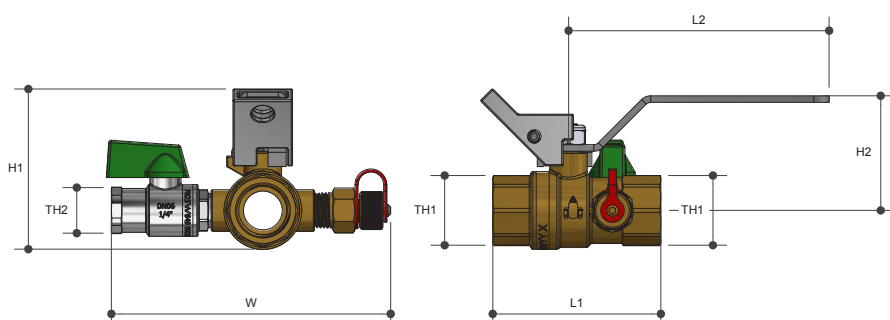

Specifications

Working temperature 1°C to 120°C

Maximum pressure rating 2500kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
HVW15FPLF	65	100	62	44	108	Rp 1/2"	Rp 1/4"
HVW20FPLF	87	100	77	51	115	Rp 3/4"	Rp 1/4"
HVW25FPLF	72	100	69	48	121	Rp 1"	Rp 1/4"
HVW32FPLF	98	140	100	71	130	Rp 1 1/4"	Rp 1/4"
HVW40FPLF	108	140	111	77	138	Rp 1 1/2"	Rp 1/4"
HVW50FPLF	127	140	127	85	151	Rp 2"	Rp 1/4"



Features

Watermark approved

Full bore

100% pressure tested

Lockable ON and OFF

Available in sizes 10mm (3/8") to 50mm (2")

Blow proof spindle

Tested and certified to WMTS-012

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Seal	PTFE
Ball	Stainless Steel
Spindle	Stainless Steel
O-Ring	FKM
Handle	Stainless Steel
Clip	Zinc

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

