
ISOLATION / NON RETURN VALVE

Butterfly Handle with Check Valve FI x FI Lead Free

Product Specifications





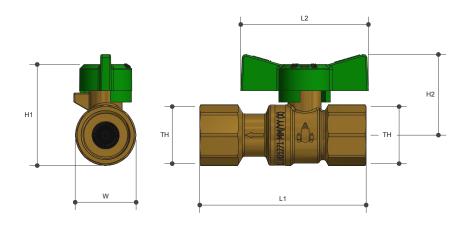









Specifications

Working temperature $1\,^{\circ}\text{C}$ to $90\,^{\circ}\text{C}$

Maximum pressure rating 1400 KPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
WDFF15LF	73	56	45	35	27	Rp 1/2"

Watermark approved

100% pressure tested

Integral non return and isolation function

Suitable for horizontal and vertical installation

Fitquik Swivel Nut

Tested and certified to AS 1357.1

Material Chart

Part	Material		
Body	DR Lead Free Brass		
Сар	DR Lead Free Brass		
Ball	Stainless Steel		
Spindle	Stainless Steel		
Seal	PTFE		
O Ring	FKM		
Handle	Aluminium		

For more information on Logi Valve, contact: Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia

P. 1300 780 430

F. 1300 780 441

E. info@austworld.com.au

