
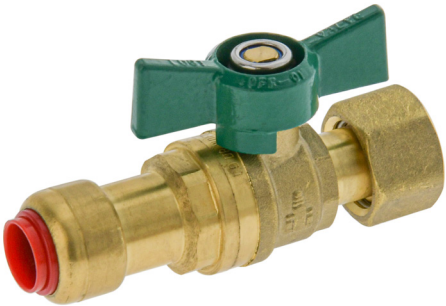


# ISOLATION / NON RETURN VALVE

Butterfly Handle with Check Valve, Swivel x Push fit  
Lead Free

## Product Specifications

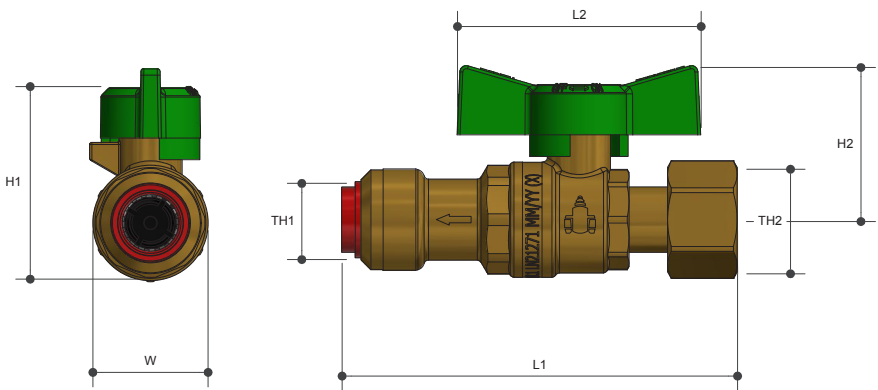

### Specifications

Working temperature 1 °C to 90 °C

Maximum pressure rating 1400 KPa

### Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
WDF15SPLF	87	56	45	35	27	DN15	G 1/2"

### Features



Watermark approved

100% pressure tested

Integral non return function

Suitable for horizontal and vertical installation

Quick pushfit copper connection

No tools required to adapt to copper

Fitquik Swivel Nut

Tested and certified to AS 1357.1

### Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Seal	PTFE
Ball	Stainless Steel
Handle	Aluminium
Retaining Ring	Stainless Steel
O-Ring	FKM
Washer	BA-U
Nut	Brass
Push Fit	POM
Check Valve	ABS
Spindle	Stainless Steel

For more information on Logi Valve, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430 F. 1300 780 441 E. [info@austworld.com.au](mailto:info@austworld.com.au)

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

