


ISOLATION / NON RETURN VALVE

Butterfly Handle with Check Valve Swivel CU
Compression Lead Free

Product Specifications

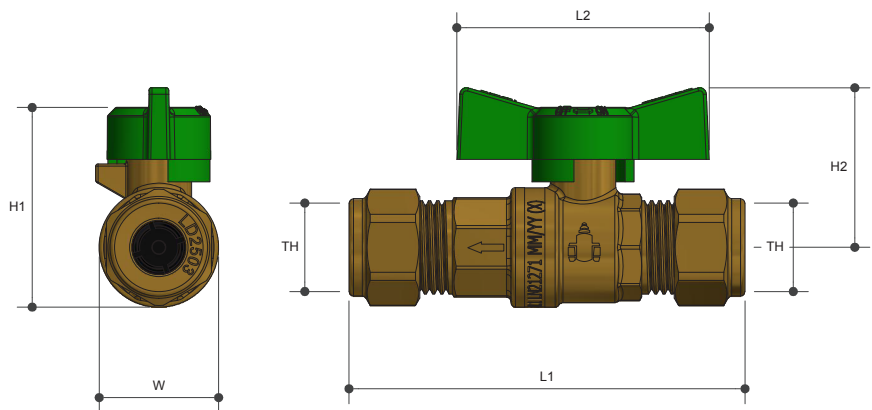

Specifications

Working temperature 1 °C to 90 °C

Maximum pressure rating 1400 KPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
WDFC15LF	88	56	45	35	27	DN15

Features

Watermark approved

100% pressure tested

Integral non return and isolation function

Suitable for horizontal and vertical installation

Tested and certified to AS 1357.1

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Aluminium
Compression Nut	Brass
Olive	Copper
Check Valve	ABS
Spindle	Stainless Steel

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

