


METER TAPPING KIT

Pipe Stand J PE X Flared Compression Lead Free

Product Specifications

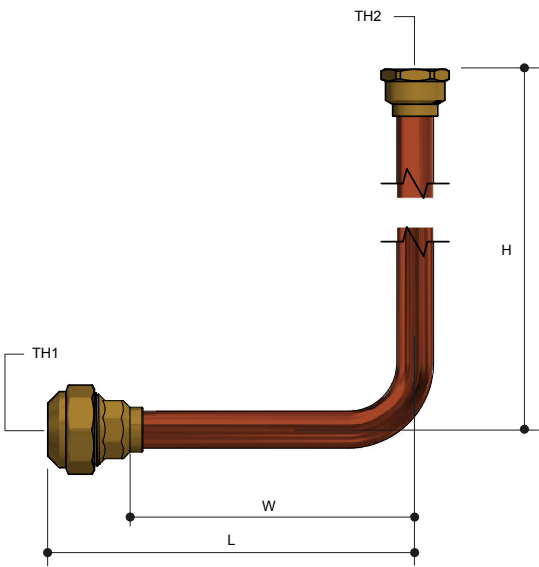

Specifications

Working temperature 1 °C to 60 °C
Max. pressure rating 1600kPa

Sizing Chart (MM)

	L	W	H	TH1	TH2
JPE20CLF	190	150	611	DN25	G 3/4"
JPE25CLF	203	150	612	DN32	G 1"



Features

Watermark Lead Free Approved
DR Lead Free Brass
100% pressure tested
Tested and certified to AS 3688

Material Chart

Part	Material
Seal	EPDM
Clamp Ring	POM
Nut	DR Lead Free Brass
Tube	Copper

For more information on Logi Civil, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018.
Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.

