


METER TAPPING KIT

Pipe Stand J PE X Flared Compression Lilac

Product Specifications

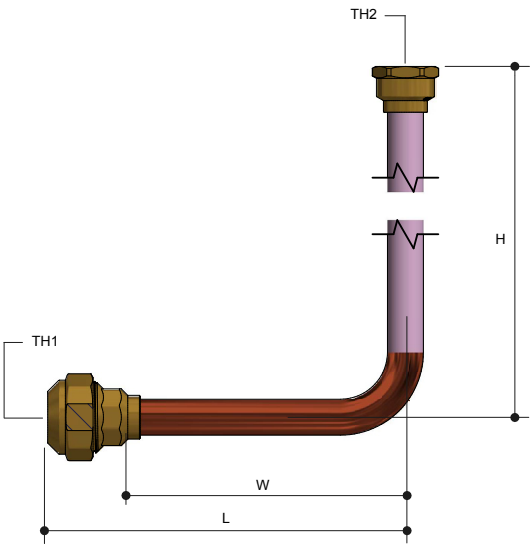

Specifications

Working temperature 1 °C to 60 °C

Max. pressure rating 1600kPa

Sizing Chart (MM)

	L	W	H	TH1	TH2
RWJPE20C	190	150	611	DN25	G 3/4"
RWJPE25C	203	150	612	DN32	G 1"



Features

- Watermark Lead Free Approved
- DR Lead Free Brass
- 100% pressure tested
- Tested and certified to AS 3688

Material Chart

Part	Material
Seal	EPDM
Clamp Ring	POM
Nut	DR Lead Free Brass
Tube	Copper

For more information on Logi Civil, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018.
Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.

