


NON RETURN VALVE

Spring Check Valve Lead Free

Product Specifications

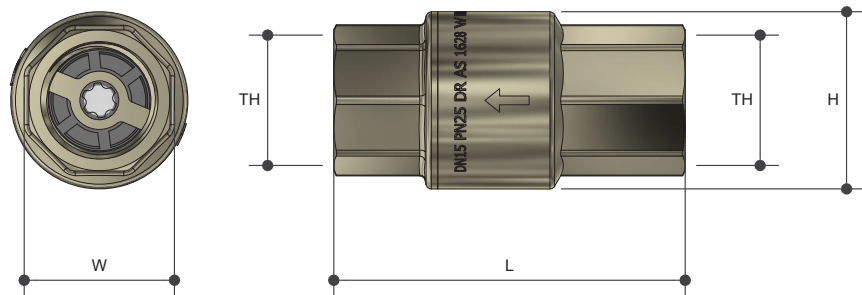

Specifications

Working temperature 1 °C to 60 °C

Maximum pressure rating 2000kPa


Maximum back pressure 1500kPa

Cracking pressure 7kPa

Sizing Chart (MM)

	L	H	W	TH
WSP15LF	64	27	32	Rp 1/2"
WSP20LF	62	39	31	Rp 3/4"
WSP25LF	73	48	39	Rp 1"
WSP32LF	83	59	47	Rp 1 1/4"
WSP40LF	84	69	54	Rp 1 1/2"
WSP50LF	96	86	67	Rp 2"

Pressure and Loss

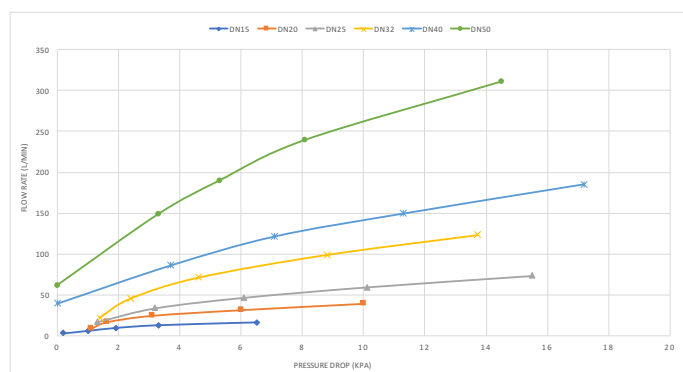

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia

P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

Features

Watermark approved

DR Lead Free Brass

Suitable for vertical and horizontal installations

High flow design with minimal head loss

Tested and certified to AS1628



Benefits

A versatile spring check valve that can be used on potable water applications and solar water.

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Stem	DR Lead Free Brass
Seal	FKM
Spring	Stainless Steel

