


MINI DUAL CHECK VALVE

MI X MI Lead Free

Product Specifications

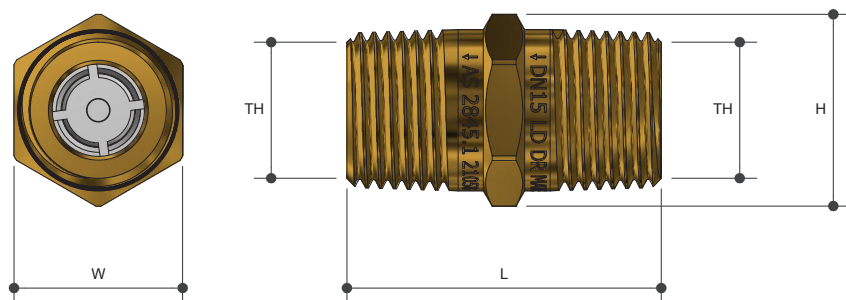

Specifications

Maximum working temperature 60°C

Maximum working pressure 1200kPa

Sizing Chart (MM)

	L	H	W	TH
MDOV15MLF	41	24	22	R 1/2"
MDOV15MCLF*	41	24	22	R 1/2"

* Chrome Plated

Features

Watermark approved

DR Lead Free Brass

Compact design

Protects against back flow and back siphonage

Suitable for horizontal and vertical installations

Low head loss

Tested and certified to AS/NZS 2845.1



Material Chart

Part	Material
Body	DR Lead Free Brass
Check Valve	POM
Circlip	Stainless Steel
Spring	Stainless Steel
O Ring	EPDM

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

