


NON RETURN VALVE

Spring Check Valve General Purpose

Product Specifications

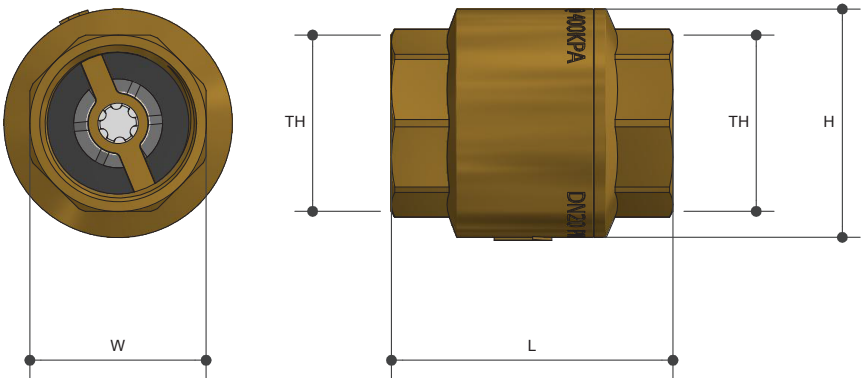

Specifications

Working temperature 1 °C to 60 °C
Maximum working pressure 1600KPa

Features

Brass
Suitable for vertical and horizontal installations
Excellent flow rates

Sizing Chart (MM)

	L	H	W	TH
SP10	42	20	22	G 3/8"
SP15	45	32	26	G 1/2"
SP20	50	41	31	G 3/4"
SP25	54	47	37	G 1"
SP32	57	57	46	G 1 1/4"
SP40	68	67	53	G 1 1/2"
SP50	72	79	66	G 2"
SP65	90	103	83	G 2 1/2"
SP80	99	110	95	G 3"
SP100	112	142	122	G 4"

Material Chart

Part	Material
Seal	NBR
Stem	POM
Body	Brass
Cap	Brass
Spring	Stainless Steel

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

