


POLY CONNECTORS

Union DN X FI Lead Free

Product Specifications

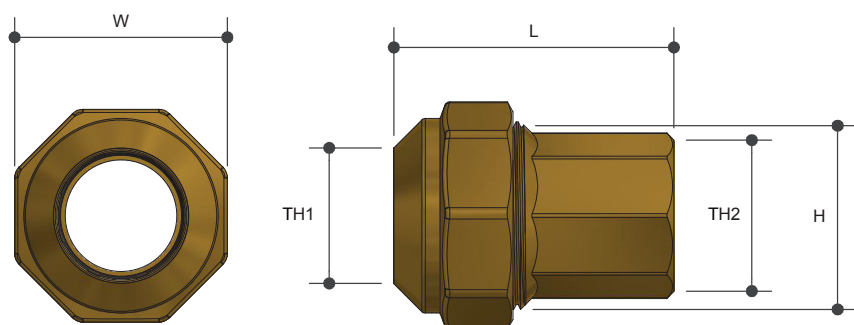

Specifications

Working temperature 1 °C to 60 °C

Max. pressure rating 1600kPa

Sizing Chart (MM)

| | L | H | W | TH1 | TH2 |
|----------|----|----|----|------|---------|
| AW4205LF | 57 | 38 | 43 | DN25 | Rp 3/4" |
| AW4206LF | 60 | 43 | 50 | DN32 | Rp 1" |

Features

Watermark Lead Free Approved

DR Lead Free Brass

100% pressure tested

No disassembly required, pipe can be inserted without disassembling the fitting

Triple lip seal

No fidly thimbles or grab rings

Spare parts available

Tested and certified to AS 4129

Material Chart

| Part | Material |
|------------|--------------------|
| Socket | DR Lead Free Brass |
| Clamp Ring | POM Acetal Resin |
| Nut | DR Brass |
| Seal | EPDM |

For more information on Logi Civil, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018.
Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.

