


POLY CONNECTORS

Union DN X DN Lead Free

Product Specifications

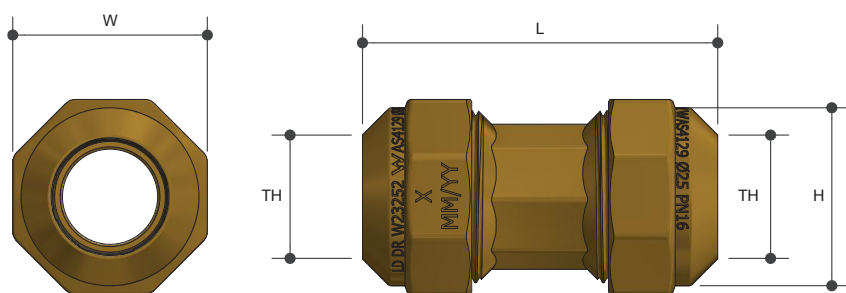

Specifications

Working temperature 1 °C to 60 °C

Max. pressure rating 1600kPa

Sizing Chart (MM)

	L	H	W	TH
AW4210LF	78	39	43	DN25
AW4214LF	79	46	50	DN32

Features

Watermark Lead Free Approved

DR Lead Free Brass

100% pressure tested

No disassembly required, pipe can be inserted without disassembling the fitting

Triple lip seal

No fiddy thimbles or grab rings

Spare parts available

Tested and certified to AS 4129



Material Chart

Part	Material
Socket	DR Lead Free Brass
Clamp Ring	POM Acetal Resin
Nut	DR Lead Free Brass
Seal	EPDM

For more information on Logi Civil, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018.
Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.

