


PRESSURE CONTROL VALVE

Pressure Reduction Inline FI Lead Free

Product Specifications

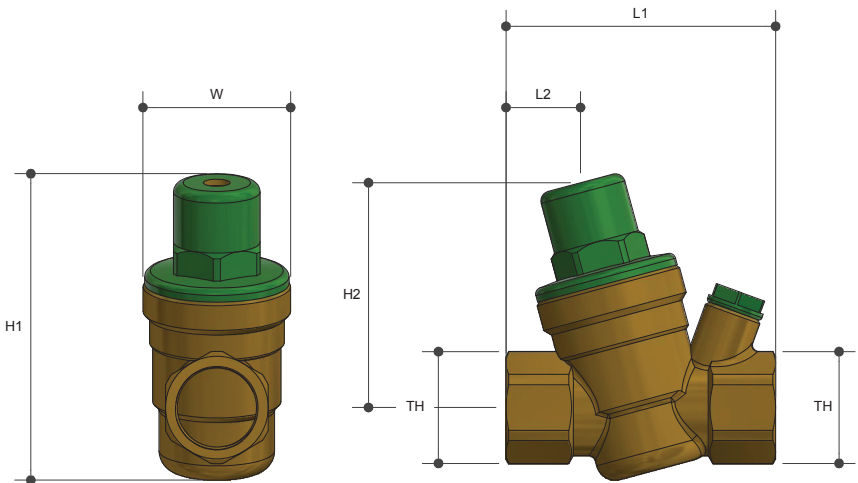

General

Pressure Reduction Valves are fitted in water systems to moderate and stabilise mains water pressure, which is at times too high for domestic appliances. The valves are pre-set at 500kPa which is the most widely used setting for domestic appliances. However the pressure reduction valves can be easily adjusted to suit your needs from a range of 150kPa to 600kPa.

Specifications

- Maximum temperature 60°C
- Outlet pressure range 150 to 600kPa
- Factory set at 500kPa
- Maximum inlet pressure 1600kPa
- Flow rate 100L/min at 700kPa
- Not to be used on hot water installations

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
PR20LF	84	22	95	70	46	Rp 3/4"

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

Features

- Watermark approved
- Excellent flow rates
- Protects appliances and heating systems
- Suitable for vertical or horizontal installations
- Internal strainer
- Adjustable 150-600kPa
- Factory set at 500kPa
- Outlet for pressure gauge
- UV resistant cap
- Tested and certified to AS 1357.1

Material Chart

Part	Material
Cover	PA
Spring	Stainless Steel
Body	DR Lead Free Brass
Cartridge	POM
Strainer	Stainless Steel

