


# PRESSURE CONTROL VALVE

Pressure Reduction Right Angle Fl  
Lead Free

## Product Specifications

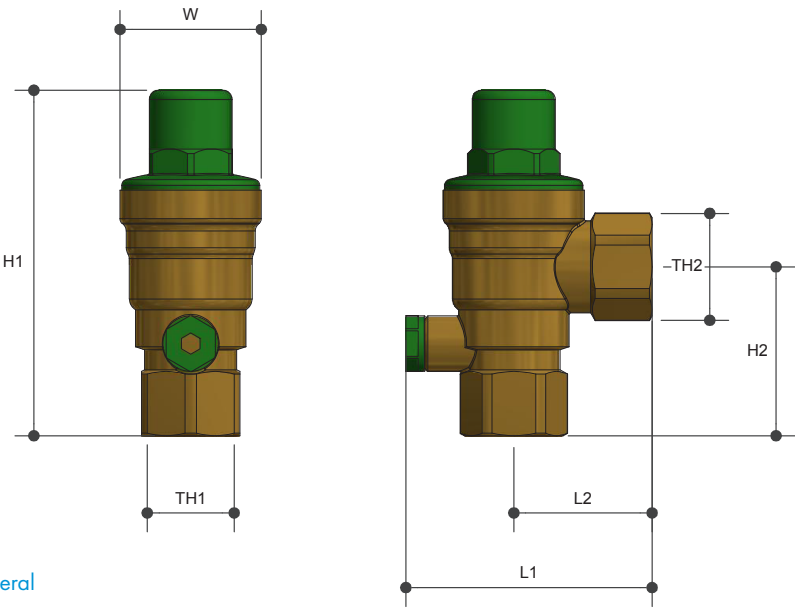

### General

Pressure Reduction Valves are fitted in water systems to moderate and stabilise mains water pressure, which is at times too high for domestic appliances. The valves are pre-set at 500kPa which is the most widely used setting for domestic appliances. However the pressure reduction valves can be easily adjusted to suit your needs from a range of 150kPa to 600kPa.

### Specifications

- Maximum temperature 60°C
- Outlet pressure range 150 to 600kPa
- Factory set at 500kPa
- Maximum inlet pressure 1600kPa
- Flow rate 100L/min at 700kPa
- Not to be used on hot water installations

### Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
RAPR20LF	80	45	113	54	46	Rp 3/4"

### Features

- Watermark approved
- Excellent flow rates
- Protects appliances and heating systems
- Suitable for vertical or horizontal installations
- Internal strainer
- Adjustable 150-600kPa
- Factory set at 500kPa
- Outlet for pressure gauge
- UV resistant cap
- Tested and certified to AS 1357.1

### Material Chart

Part	Material
Cover	PA
Spring	Stainless Steel
Body	DR Brass Lead Free
Cartridge	POM
Strainer	Stainless Steel

For more information on Logi Valve, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430      F. 1300 780 441      E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

