


PVC BALL VALVE

Threaded

Product Specifications

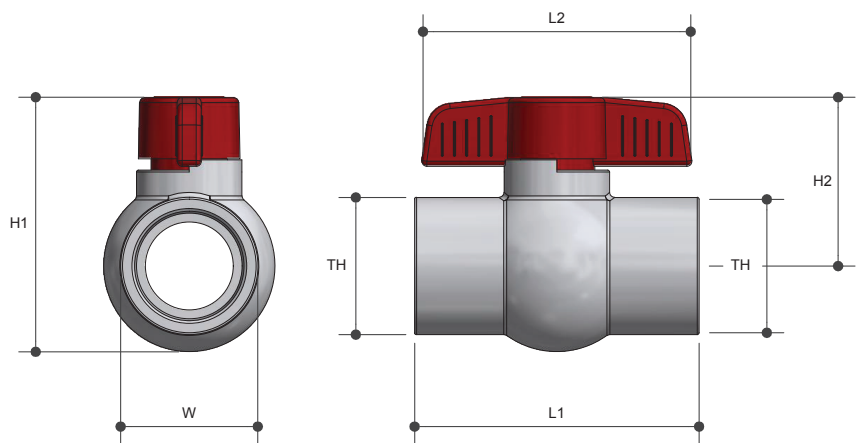

Specifications

Working temperature 1°C to 45°C
Maximum pressure rating 1000kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
PVCBV15	80	69	64	44	32	BSPT 1/2"
PVCBV20	94	81	76	52	39	BSPT 3/4"
PVCBV25	106	100	94	65	45	BSPT 1"
PVCBV32	112	108	103	70	54	BSPT 1 1/4"
PVCBV40	129	108	113	75	63	BSPT 1 1/2"
PVCBV50	148	138	126	81	76	BSPT2"

Features

- Positive drip-tight shutoff.
- Rapid 1/4-turn on/off control manually operated
- Durable PVC body and rugged ABS handle
- Compatible with PVC piping
- Threaded female connections
- Available in sizes 15mm (1/2") to 50mm (2")

Material Chart

Part	Material
Body	PVC
Seal	PTFE
Ball	PVC
O Ring	EPDM
Handle	ABS
Cap	ABS

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

