


PVC BALL VALVE

Threaded

Product Specifications

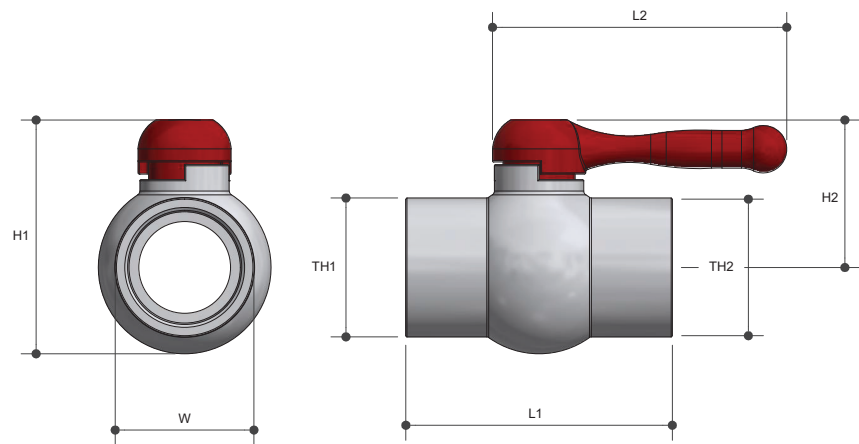

Specifications

Working temperature 1 °C to 45 °C
Maximum pressure rating 1000kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
PVCBV65	178	193	166	109	93	BSPT 1 1/4"
PVCBV80	209	193	181	116	107	BSPT 1 1/2"
PVCBV100	294	262	237	152	135	BSPT 2"

Features

- Positive drip-tight shutoff.
- Rapid 1/4-turn on/off control manually operated
- Durable PVC body and rugged ABS handle
- Compatible with PVC piping
- Threaded female connections
- Available in sizes 65mm (2 1/2") to 100mm (4")

Material Chart

Part	Material
Body	PVC
Seal	PTFE
Ball	PVC
O Ring	EPDM
Handle	ABS
Cap	ABS

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

