


SUB METERING

Ball Valve Fixed Lockable Lead Free

Product Specifications

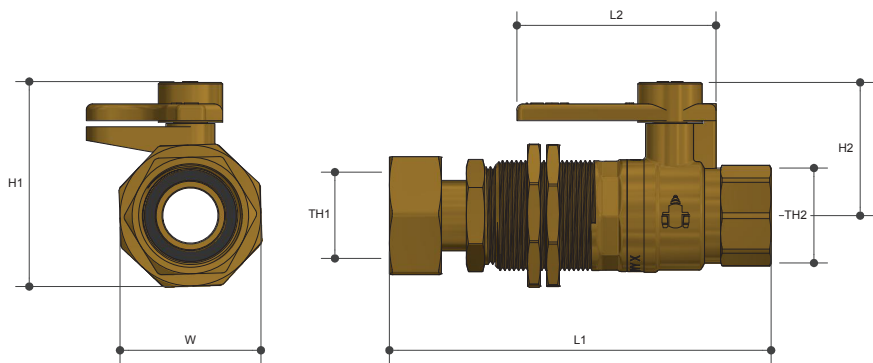

Specifications

Working temperature 1°C to 90°C

Max. pressure rating 1600kPa

Meter thread

Features

Watermark Lead Free Approved

Maximum valve adjustment

100% pressure tested

Locking nut on coupling

Tested and certified to AS 4796

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
WB20MBLMK1LF	108	50	63	44	43	Rp 3/4"	DN20*
WB20MBLMK2LF	110	50	65	44	48	Rp 3/4"	DN25**

*Meter thread QLD/VIC WSA PS 300

**Meter thread NSW WSA PS 300

Material Chart

Part	Material
Body	DR Lead Free Brass
Nut	DR Brass
Adaptor	DR Lead Free Brass
Handle	DR Brass
Ball	Stainless Steel
O Ring	FKM
Washer	EPDM
Spring	Stainless Steel

For more information on Logi Civil, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018.
Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.

