


# SWIVEL NUT BALL VALVE

FI Water Lead Free



## Product Specifications

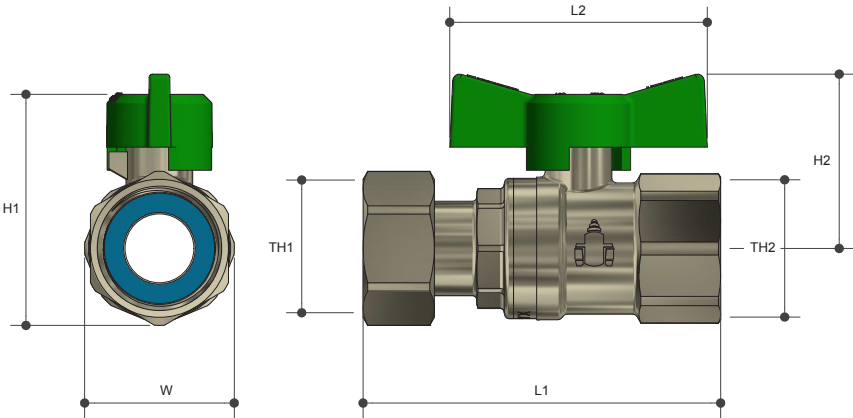

### Specifications

Working temperature 1 °C to 95 °C

Maximum pressure rating 2500kPa

### Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
H15FWLF	78	56	50	38	33	G 3/4"	Rp 3/4"
H20FWLF	74	56	48	38	30	G 1/2"	Rp 1/2"

### Features

Watermark Approved

Full bore

100% pressure tested

Available in sizes 15mm (1/2") to 20mm (3/4")

Blow proof spindle

Swivel nut

Tested and certified to WMTS-012

### Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Seal	PTFE
Ball	Stainless Steel
Spindle	Stainless Steel
Nut	Brass
Retaining Ring	Stainless Steel

For more information on Logi Valve, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430      F. 1300 780 441      E. [info@austworld.com.au](mailto:info@austworld.com.au)

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

